



Model Name


RM7503

Unique selling point

- * Brilliant UHD resolution image quality
- * Eye-care technology to deliver a zero-flicker viewing experience with ultra-low blue light emission
- * Built-in annotation software EZWrite 6
- * Account management system (AMS) provides personalized workspace

Panel	Screen Diagonal	75"	
	Backlight	DLED	
	Resolution	3840 x 2160	
	Aspect Ratio	16 : 9	
	Brightness	450 nits	
	Contrast Ratio	1200:1	
	Viewing Angle	178 degree (H) / 178 degree (V)	
	Color gamut (x% NTSC)	72%	
	Frame Rate	60Hz	
	Response Time	8 ms	
	Panel bit	10-bit	
	Light life	50,000hrs	
	Orientation	Landscape	
	Touch solution	Touch tech.	IR
Number of touches		Up to 20 Point Multi-touch	
Touch interface		USB (type B) x 3	
Cover glass	Thickness	Tempered, 3.2 mm	
	Hardness	9H	
	AG coating	Yes	
Speaker	Built-in speaker	16W x 2	
Interface	Input	Power (AC) Inlet	x 1
		D-sub (VGA)	x 1
		HDMI	x 3 (2 x HDMI 2.0, 1x HDMI 2.1)
		USB Type A	x 7 (USB 2.0 x2 + USB 3.0 x 5 include Wi-Fi Slot)
		USB Type C	x 1
		RS232	x 1
	Output	LAN	x 1
		Microphone	x 6
		HDMI	x 1
		SPDIF	x 1
	Line out (3.5mm)	x 1	
	LAN	x 1	
Mechanical	Dimension (WxHxD) (Without Packing / With Packing)	1717.1x 1065.3 x 121.5mm / 1900 x 225 x 1160mm	
	Net Weight/Gross Weight	54 Kg / 70 Kg	
Power	Power supply	AC100 to 240V, 50 / 60 Hz	
	Power consumption	395.9W/h	
OSD	On-Screen Display Languages	English / French / German / Dutch / Polish / Russian / Czech / Danish / Swedish / Italian / Romanian / Finnish / Norwegian / Greek / Hungarian / Spanish / Portuguese / Traditional Chinese / Simplified Chinese / Arabic / Japanese / Thai / Persian / Vietnamese / Korean / Turkish / Indonesia (27L)	
Accessories	Standard	Remote Control w/ Battery	x 1
		Power Cord	By Region
		Touch pen	x 2
		Quick Start Guide	x 1
		Touch Cable (USB to USB)	x 1
		HDMI cable	x 1
		VGA(D-sub 15pin) Cable	x 1
		TYPE C Cable	x 1
Wall mount	x 1		

Input/output terminals

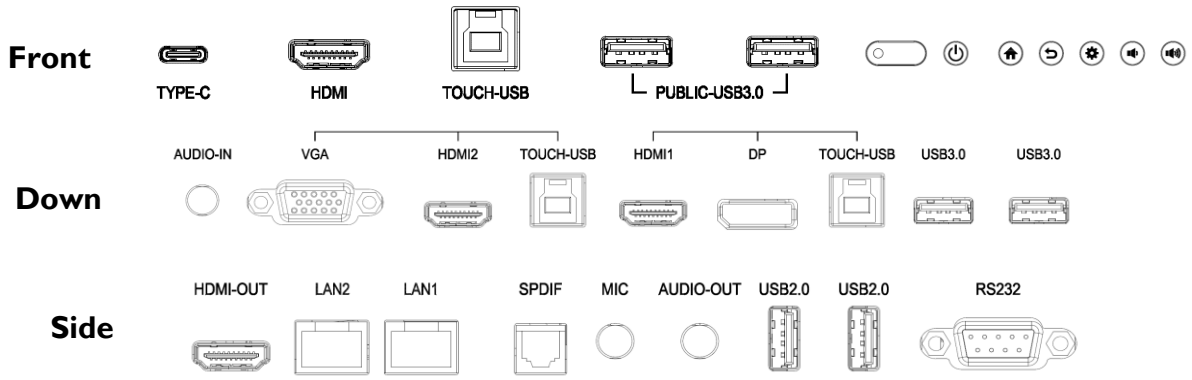

Wallmount

